



## TITLE:

Access Purple Pipe

## CODE:

SFX/ACCESS-1-LSZH-D-PUR-1

## DESCRIPTION:



1m (per metre) Access 1 pr1 20AWG

OSC, pr2&3 22AWG ISP, 9cores 22AWG

OSC Purple LSZH

## SUPPLIED AS:

Per 1m Lengths

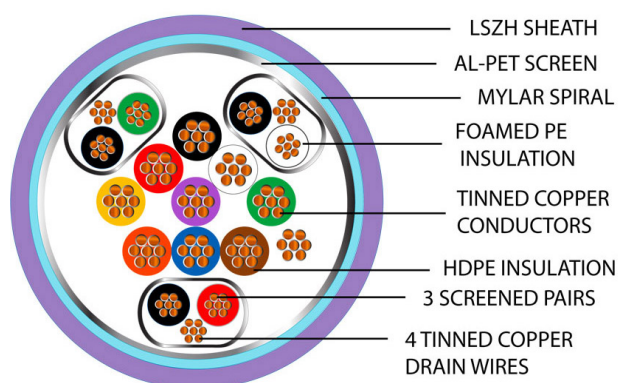



## Product Specification

### Cable Construction

Cable Construction	Screened pair x 2
CPR	Dca -s:2 -a:1 -d:2
Conductor	Tinned Copper
Conductor Diameter (mm)	0.24 ±0.008 x 7
Overall Diameter (mm)	9.10 ±0.30

### Insulation

Insulation	Foamed PE
Insulation Colour	Black,RedBlack,White
Insulation Resistance @20°C	>200MO/km
Insulation Thickness (mm)	0.32

### Outer/Jacket Specification

Jacket	LSZH
Overall Colour	Purple
Overall Diameter (mm)	9.10 ±0.30
Jacket Colour	Purple RAL 4005
Jacket Thickness (mm)	1.00 ±0.80

### Electrical Characteristics

Insulation Resistance @20°C	>200MO/km
Max Conductor DC resistance @ 20°C	<60O/km
Rated Temperature (°C)	-40°C to 70°C
Rated Voltage (V)	30V





**BELDEN  
EQUIVALENTS**

**Securi-Flex®**

**MORE INFORMATION:**

Sorry, no more information is available for this product

Belden equivalents



[enquiries@securiflex.co.uk](mailto:enquiries@securiflex.co.uk) | [www.securiflex.co.uk](http://www.securiflex.co.uk) | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

**FLAME-FLEX®**

**Drum-Roll**

**LUCKINS®**

**apim**  
supply chain

**ELECTRICAL  
DISTRIBUTORS  
ASSOCIATION**

**BASEC**  
MEMBER

**KNX**  
MEMBER

**cai**  
MEMBER

**CPA**  
MEMBER

**UK  
CA**