



TITLE:

Access Purple Pipe

CODE:


SFX/ACCESS-1-LSZH-D-PUR-1000

DESCRIPTION:

1000m Access 1 pr1 20AWG OSC, pr2&3
22AWG ISP, 9cores 22AWG OSC Purple
LSZH

SUPPLIED AS:

Reel of 1000m

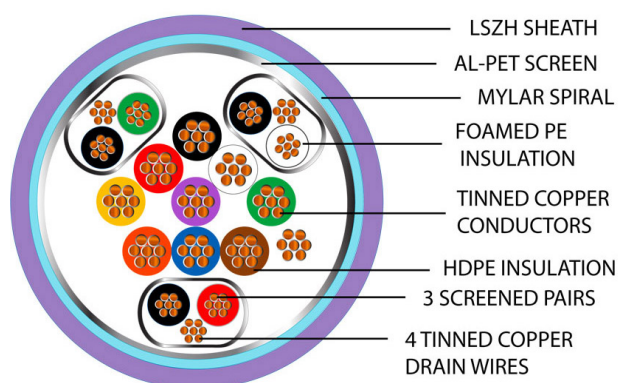



Product Specification

Cable Construction

Cable Construction	Screened pair x 2
CPR	Dca -s:2 -a:1 -d:2
Conductor	Tinned Copper
Conductor Diameter (mm)	0.24 ±0.008 x 7
Overall Diameter (mm)	9.10 ±0.30

Insulation

Insulation	Foamed PE
Insulation Colour	Black,RedBlack,White
Insulation Resistance @20°C	>200MO/km
Insulation Thickness (mm)	0.32

Outer/Jacket Specification

Jacket	LSZH
Overall Colour	Purple
Overall Diameter (mm)	9.10 ±0.30
Jacket Colour	Purple RAL 4005
Jacket Thickness (mm)	1.00 ±0.80

Electrical Characteristics

Insulation Resistance @20°C	>200MO/km
Max Conductor DC resistance @ 20°C	<60O/km
Rated Temperature (°C)	-40°C to 70°C
Rated Voltage (V)	30V





**BELDEN
EQUIVALENTS**

Securi-Flex®

MORE INFORMATION:

Sorry, no more information is available for this product

Belden equivalents



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

