



NETWORK CABLE



Network cable

TITLE:

Cat6a 4pr U/FTP

CODE:


SFX/C6A-UFTP-LSZH-D-WHT-305

DESCRIPTION:

305m Category 6A, 4pr U/FTP White
LSZH

SUPPLIED AS:

Reel of 305m

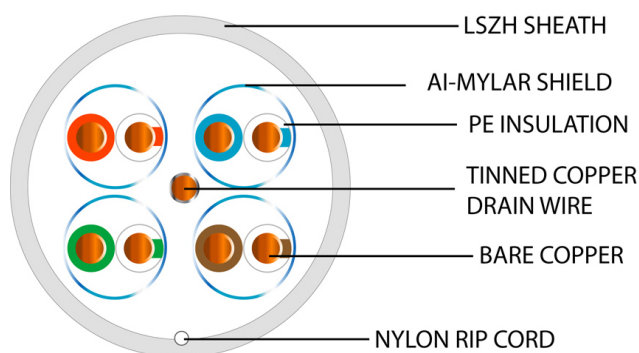

enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



Product Specification

Cable Construction

| | |
|-------------------------|-----------------|
| CPR | Dca -s1 -a1 -d2 |
| Conductor | Bare Copper |
| Conductor Diameter (mm) | 0.565 ±0.005 |
| Overall Diameter (mm) | 6.80 ±0.50 |

Insulation

| | |
|---------------------------|---|
| Insulation | PE |
| Insulation Colour | Blue/White/Blue;Orange/White/Orange;Green/White/Green;Brown/White/Brown |
| Insulation Thickness (mm) | 0.36 |

Outer/Jacket Specification

| | |
|-----------------------|----------------|
| Jacket | LSZH |
| Overall Colour | White |
| Overall Diameter (mm) | 6.80 ±0.50 |
| Jacket Colour | White RAL 9003 |
| Jacket Thickness (mm) | 0.50 ±0.05 |
| Nylon Rip-Cord | White 210D |

Electrical Characteristics

| | |
|------------------------------------|---------------|
| Max Conductor DC resistance @ 20°C | <93.80/km |
| Rated Temperature (°C) | -40°C to 70°C |



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



NETWORK CABLE



MORE INFORMATION:

Sorry, no more information is available for this product

Network cable



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

