

**TITLE:**

Cat6 4pr UTP

CODE:



SFX/C6-UTP-LSZH-D-BLU-305

DESCRIPTION:

305m Category 6, 4pr UTP Blue LSZH

SUPPLIED AS:

Reel of 305m

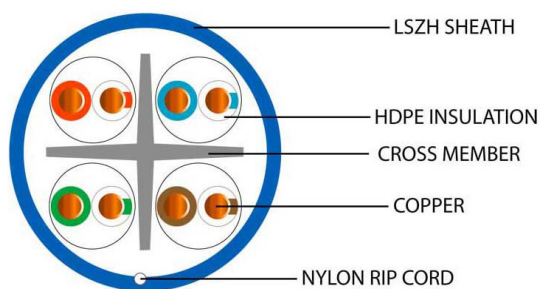

enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



Product Specification

Cable Construction

CPR	Dca -s2 -a2 -d2
Conductor	Bare Copper
Conductor Diameter (mm)	0.53 ±0.01
Overall Diameter (mm)	6.10 ±0.03

Insulation

Insulation	HDPE
Insulation Colour	Blue/White/Blue;Orange/White/Orange;Green/White/Green;Brown/White/Brown
Insulation Thickness (mm)	0.18

Outer/Jacket Specification

Jacket	LSZH
Overall Colour	Blue
Overall Diameter (mm)	6.10 ±0.03
Jacket Colour	Blue RAL 5012
Jacket Thickness (mm)	0.55 ±0.03
Nylon Rip-Cord	White 210D

Electrical Characteristics

Max Conductor DC resistance @ 20°C	<950/km
Rated Temperature (°C)	-40°C to 70°C



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



NETWORK CABLE



MORE INFORMATION:

Sorry, no more information is available for this product

Network cable



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

