

**TITLE:**

CW1308 LSF

**CODE:**

SFX/CW1308-20-LSF-WHT-100


**DESCRIPTION:**

100m CW1308 20 Pair White LSF

**SUPPLIED AS:**

Reel of 100m

- Manufactured to British Telecom specification and generally used for internal connections
- Popular in the security industry for door entry systems where voice is required
- Low smoke and fume plastic is good for use inside public buildings and spaces as will not emit toxic gases if the cable catches fire
- Can also be used for low level signal applications
- Improved performance and protection against fire
- Good for low cost fixed installations

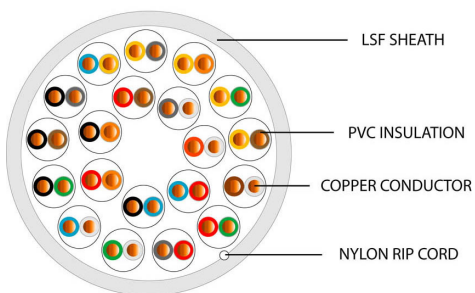

enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.



## Product Specification

25-YEAR WARRANTY



### Cable Construction

|                         |             |
|-------------------------|-------------|
| Cable Construction      | 20 Pairs    |
| CPR                     | Fca         |
| Conductor               | Bare Copper |
| Conductor Diameter (mm) | 0.40 ±0.008 |
| Overall Diameter (mm)   | 8.60 ±0.20  |

### Insulation

|                             |  |
|-----------------------------|--|
| Insulation                  | PVC  |
| Insulation Colour           | Orange,Black,Black/Green,Green/Black,Black/Brown,Brown/Black,Black/Grey,Grey/Black,Yellow/Blue,Blue/Yellow,Yellow/Orange,Orange/Yellow,Yellow/Green,Green/Yellow,Yellow/Brown,Brown/Yellow,Yellow/Grey,Grey/Yellow |
| Insulation Resistance @20°C | >200MO/km  |
| Insulation Thickness (mm)   | 0.185  |

### Outer/Jacket Specification

|                       |                |
|-----------------------|----------------|
| Jacket                | LSF            |
| Overall Colour        | White          |
| Overall Diameter (mm) | 8.60 ±0.20     |
| Jacket Colour         | White RAL 9003 |
| Jacket Thickness (mm) | 0.45           |
| Nylon Rip-Cord        | 210D           |

### Electrical Characteristics

|                                    |               |
|------------------------------------|---------------|
| Insulation Resistance @20°C        | >200MO/km     |
| Max Conductor DC resistance @ 20°C | <120O/km      |
| Rated Temperature (°C)             | -20°C to 80°C |
| Rated Voltage (V)                  | 30V           |




enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

**MORE INFORMATION:**

| CLASSIFICATION CRITERIA          |   |  | CPR GUIDE   |   |  |
|----------------------------------|---|--|---|---|--|
| EURO CLASS (ca: cable)           | FIRE RATING   | SFX COMMENT  | Securi-Flex®  |   |  |
| Reaction to Fire BS EN ISO 1716  |   |  | SUBCLASSIFICATIONS FOR EUROCLASSES B <sub>ca</sub> to D <sub>ca</sub>   |   |  |
| <b>A<sub>ca</sub></b>            | Does not contribute to the fire                                       | Due to availability, it will be almost impossible for a cable to meet A <sub>ca</sub> , so they should only be specified with extreme caution.   | <b>(S) SMOKE PRODUCTION</b>   | <b>(D) FLAMING DROPLETS</b>   | <b>(A) SMOKE ACIDITY</b>                                 |
| Reaction to Fire BS EN 50399     |   |  | BS EN 50399/BS EN 61034-2   | BS EN 50399   | BS EN 60754-2  |
| <b>B1<sub>ca</sub></b>           | Minimum contribution to the fire                                      | It's highly unlikely the commonly-used cables will be classified to Class B1 <sub>ca</sub> .   | s1a: s1 + transmittance >=80% (BS EN 61034-2)   | d0: No fall of droplets or flaming particles, times for 1200 seconds                                    | a1: Very low acidity (conductivity <2.5 µS/mm & pH >4.3) |
| <b>B2<sub>ca</sub></b>           | Combustible, low flame spread & heat release contribution to the fire | Similar to Class C <sub>ca</sub> , although a lower acceptable heat release rate and burn measurement. In practice, this is likely to be the highest class cables will meet.   | s1b: s1 + transmittance >=60% <80% (BS EN 61034-2)  | d1: Fall of droplets or flaming particles that persist for less than 10 seconds, timed for 1200 seconds | a2: low acidity (conductivity <10 µS/mm & pH >4.3)       |
| <b>C<sub>ca</sub></b>            | Combustible, moderate flame spread & heat release                     | This is a more rigorous test than Class D <sub>ca</sub> , this is widely accepted across Europe as the 'go to' classification, but be aware, many cables do not meet Class C <sub>ca</sub> though availability is improving. | s1: Low production of slow propagation of smoke   |   |  |
| <b>D<sub>ca</sub></b>            | Combustible, moderate flame spread & heat release                     | This classification has relatively little use or acceptance within specifying/contracting organisations. This is because no large scale fire growth is measured.   | s2: Intermediate production & propagation of smoke  | d2: None of the above   | a2: None of the above                                    |
| Reaction to Fire BS EN 60332-1-2 |   |  | Visit us online: <a href="http://www.securiflex.co.uk">www.securiflex.co.uk</a>   |   |  |
| <b>E<sub>ca</sub></b>            | Combustible, limited fire spread of less than 425mm                   | A basic test for vertical flame propagation for a single insulated wire or cable using a 1 KW pre-mixed flame. Note: This test does not measure heat release, toxic fumes or smoke.  | <b>SFX</b> The Trusted Cable Brand  |   |  |
| <b>F<sub>ca</sub></b>            | Combustible, fire spread of more than 425mm                           | Cables classified to Class F <sub>ca</sub> may have high levels of flammability due to the materials they are made of. This does not mean that the cable cannot be used, it is more likely to be used external.              | Classes A to E have to be tested by an independent authorised laboratory. Most cables will fall into classes B2 <sub>ca</sub> to E <sub>ca</sub> . For a cable to meet A <sub>ca</sub> , B1 <sub>ca</sub> , B2 <sub>ca</sub> or C <sub>ca</sub> , there also needs to be regular on-going factory audits. |   |  |

**OUR OPERATING TEMPERATURE RANGE GUIDE**

Securi-Flex®

enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

FLAME-FLEX Drum-Flex LUCKINS

epim

ELECTRICAL RETENTION ASSOCIATION

BASEC

KNX

cai

UK CA