



# DEFENCE STANDARD CABLE

# Securi-Flex®

Defence standard cable

**TITLE:**

Defence 16-2 Unscreened LSZH

**CODE:**




SFX/DS-16-2-12A-LSZH-D-BLK-1

**DESCRIPTION:**

1m (per metre) Def Standard 16 x 0.2mm  
12 Core Unscreened Black UV LSZH

**SUPPLIED AS:**

Per 1m Lengths

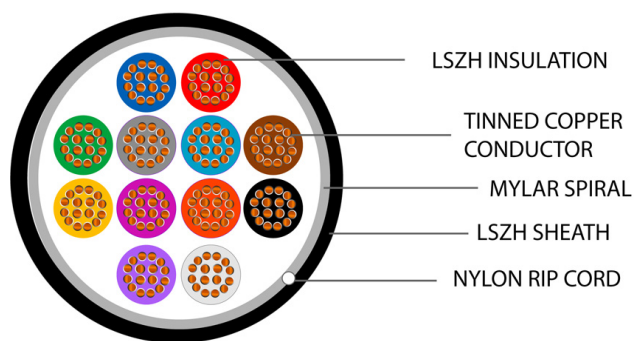

[enquiries@securiflex.co.uk](mailto:enquiries@securiflex.co.uk) | [www.securiflex.co.uk](http://www.securiflex.co.uk) | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.



## Product Specification

### Cable Construction

Cable Construction	12 Cores
CPR	Dca -s:2 -a:1 -d:2
Conductor	Tinned Copper
Conductor Diameter (mm)	0.19 ±0.008 x 16(0.52mm²)
Overall Diameter (mm)	9.10 ±0.20

### Insulation

Insulation	LSZH
Insulation Colour	Red,Blue,Green,Yellow,White,Black,Brown,Violet,Orange,Pink,Turquoise,Grey
Insulation Thickness (mm)	0.3

### Outer/Jacket Specification

Jacket	UV LSZH
Overall Colour	Black
Overall Diameter (mm)	9.10 ±0.20
Jacket Colour	Black RAL 9005
Jacket Thickness (mm)	0.7
Nylon Rip-Cord	210D

### Electrical Characteristics

Max Conductor DC resistance @ 20°C	<390/km
Rated Temperature (°C)	-40°C to 70°C
Rated Voltage (V)	600V





**DEFENCE  
STANDARD CABLE**

**Securi-Flex®**

**MORE INFORMATION:**

Sorry, no more information is available for this product

Defence standard cable



[enquiries@securiflex.co.uk](mailto:enquiries@securiflex.co.uk) | [www.securiflex.co.uk](http://www.securiflex.co.uk) | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

