



# DEFENCE STANDARD CABLE



Defence standard cable

**TITLE:**

Defence 16-2 Unscreened LSZH

**CODE:**



SFX/DS-16-2-3A-LSZH-D-BLK-1

**DESCRIPTION:**

1m (per metre) Def Standard 16 x 0.2mm  
3 Core Unscreened Black UV LSZH

**SUPPLIED AS:**

Per 1m Lengths

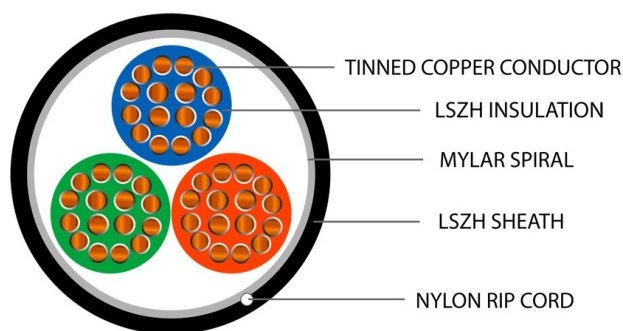

enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



## Product Specification

### Cable Construction

Cable Construction	3 Cores
CPR	Dca -s:2 -a:1 -d:2
Conductor	Tinned Copper
Conductor Diameter (mm)	0.19 ±0.008 x 16(0.52mm <sup>2</sup> )
Overall Diameter (mm)	5.00 ±0.20

### Insulation

Insulation	LSZH
Insulation Colour	Red,Blue,Green
Insulation Thickness (mm)	0.3

### Outer/Jacket Specification

Jacket	UV LSZH
Overall Colour	Black
Overall Diameter (mm)	5.00 ±0.20
Jacket Colour	Black RAL 9005
Jacket Thickness (mm)	0.6
Nylon Rip-Cord	210D

### Electrical Characteristics

Max Conductor DC resistance @ 20°C	<390/km
Rated Temperature (°C)	-40°C to 70°C
Rated Voltage (V)	600V





**DEFENCE  
STANDARD CABLE**

**Securi-Flex®**

**MORE INFORMATION:**

Sorry, no more information is available for this product

Defence standard cable



[enquiries@securiflex.co.uk](mailto:enquiries@securiflex.co.uk) | [www.securiflex.co.uk](http://www.securiflex.co.uk) | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

**FLAME-FLEX®**

**Drum-Roll®**

**LUCKINS®**

**apim**  
supply chain

**ELECTRICAL  
DISTRIBUTORS'  
ASSOCIATION**

**BASEC**

**KNX**  
MEMBER

**cai**

**CPA**

**UK  
CA**