



DEFENCE STANDARD CABLE



Defence standard cable

TITLE:

Defence 16-2 Unscreened LSZH

CODE:





SFX/DS-16-2-8A-LSZH-D-BLK-1000

DESCRIPTION:

1000m Def Standard 16 x 0.2mm 8 Core
Unscreened Black UV LSZH

SUPPLIED AS:

Reel of 1000m

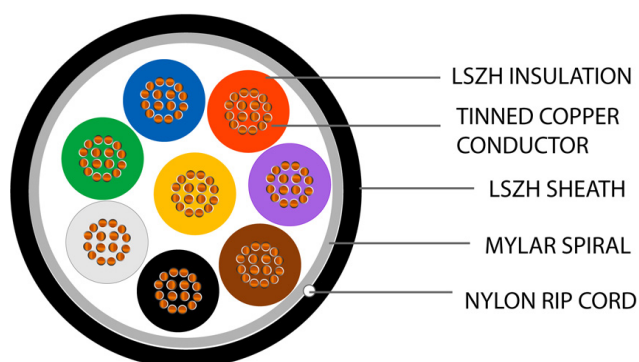

enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



Product Specification

Cable Construction

| | |
|-------------------------|--|
| Cable Construction | 8 Cores |
| CPR | Dca -s:2 -a:1 -d:2 |
| Conductor | Tinned Copper |
| Conductor Diameter (mm) | 0.19 ±0.008 x 16(0.52mm ²) |
| Overall Diameter (mm) | 7.40 ±0.20 |

Insulation

| | |
|---------------------------|---|
| Insulation | LSZH |
| Insulation Colour | Red,Blue,Green, Yellow,White,Black,Brown,Violet |
| Insulation Thickness (mm) | 0.3 |

Outer/Jacket Specification

| | |
|-----------------------|----------------|
| Jacket | UV LSZH |
| Overall Colour | Black |
| Overall Diameter (mm) | 7.40 ±0.20 |
| Jacket Colour | Black RAL 9005 |
| Jacket Thickness (mm) | 0.7 |
| Nylon Rip-Cord | 210D |

Electrical Characteristics

| | |
|------------------------------------|---------------|
| Max Conductor DC resistance @ 20°C | <390/km |
| Rated Temperature (°C) | -40°C to 70°C |
| Rated Voltage (V) | 600V |





**DEFENCE
STANDARD CABLE**

Securi-Flex®

Defence standard cable

MORE INFORMATION:

Sorry, no more information is available for this product



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

