



DEFENCE STANDARD CABLE



Defence standard cable

TITLE:

Defence 7-2 Unscreened LSZH

CODE:

SFX/DS-7-2-12A-LSZH-D-BLK-1



DESCRIPTION:

1m (per metre) Def Standard 7 x 0.2mm

12 Core Unscreened Black UV LSZH

SUPPLIED AS:

Per 1m Lengths

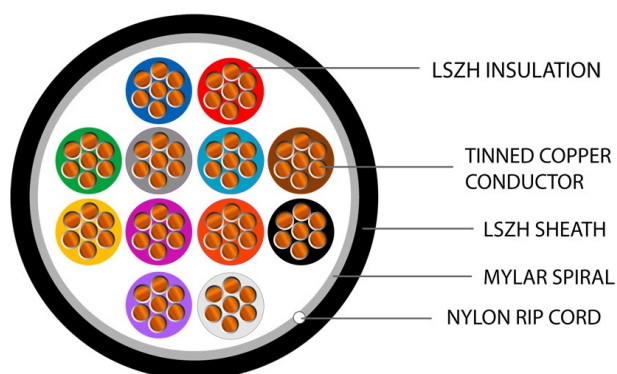

enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



Product Specification

Cable Construction

Cable Construction	12 Cores
CPR	Dca -s:2 -a:1 -d:2
Conductor	Tinned Copper
Conductor Diameter (mm)	0.19 ±0.008 x 7 (0.2mm ²)
Overall Diameter (mm)	6.10 ±0.20

Insulation

Insulation	LSZH
Insulation Colour	Red, Blue, Green, Yellow, White, Black, Brown, Violet, Orange, Pink, Turquoise, Grey
Insulation Thickness (mm)	0.3

Outer/Jacket Specification

Jacket	UV LSZH
Overall Colour	Black
Overall Diameter (mm)	6.10 ±0.20
Jacket Colour	Black RAL 9005
Jacket Thickness (mm)	0.7
Nylon Rip-Cord	210D

Electrical Characteristics

Max Conductor DC resistance @ 20°C	<390/km
Rated Temperature (°C)	-40°C to 70°C
Rated Voltage (V)	600V





**DEFENCE
STANDARD CABLE**

Securi-Flex®

MORE INFORMATION:

Sorry, no more information is available for this product

Defence standard cable



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

