



DEFENCE STANDARD CABLE



Defence standard cable

TITLE:

Defence 7-2 Unscreened LSZH

CODE:



SFX/DS-7-2-12A-LSZH-D-BLK-500

DESCRIPTION:

500m Def Standard 7 x 0.2mm 12 Core
Unscreened Black UV LSZH

SUPPLIED AS:

Reel of 500m

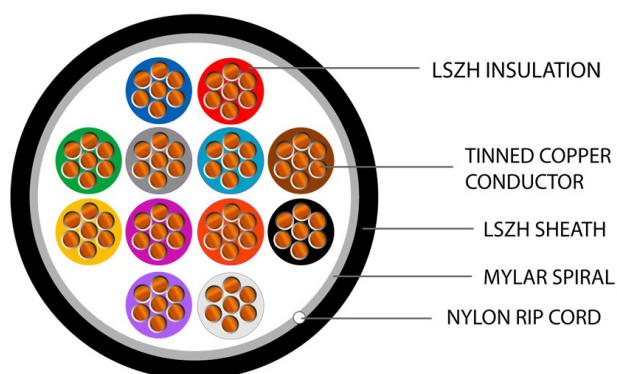

enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



Product Specification

Cable Construction

Cable Construction	12 Cores
CPR	Dca -s:2 -a:1 -d:2
Conductor	Tinned Copper
Conductor Diameter (mm)	0.19 ±0.008 x 7 (0.2mm ²)
Overall Diameter (mm)	6.10 ±0.20

Insulation

Insulation	LSZH
Insulation Colour	Red, Blue, Green, Yellow, White, Black, Brown, Violet, Orange, Pink, Turquoise, Grey
Insulation Thickness (mm)	0.3

Outer/Jacket Specification

Jacket	UV LSZH
Overall Colour	Black
Overall Diameter (mm)	6.10 ±0.20
Jacket Colour	Black RAL 9005
Jacket Thickness (mm)	0.7
Nylon Rip-Cord	210D

Electrical Characteristics

Max Conductor DC resistance @ 20°C	<390/km
Rated Temperature (°C)	-40°C to 70°C
Rated Voltage (V)	600V





**DEFENCE
STANDARD CABLE**

Securi-Flex®

MORE INFORMATION:

Sorry, no more information is available for this product

Defence standard cable



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

FLAME-FLEX® Drum-Roll LUCKINS®

apim
supply chain

**ELECTRICAL
DISTRIBUTORS
ASSOCIATION**

BASEC

KNX
MEMBER

cai

CPA

**UK
CA**