



TITLE:

FR30 Fire Standard Flame-Flex 60

CODE:

SFX/FC-2C-1.5-FR60-STD-RED-100


DESCRIPTION:

100m 2 Core 1.5mm 300/500V Red
Standard FLAME-FLEX 60

SUPPLIED AS:

Reel of 100m

- Can be used both internally and externally in environments where suitable protection is present
- Polymer tape comes away from the sheath when stripping cable
- Low smoke zero halogen plastic is good for use inside public buildings and spaces as will not emit toxic gases if the cable catches fire
- Can be used for emergency lighting applications
- Suitable for installations where a circuit must be maintained for up to 60 minutes in the event of a fire
- Various lengths in stock

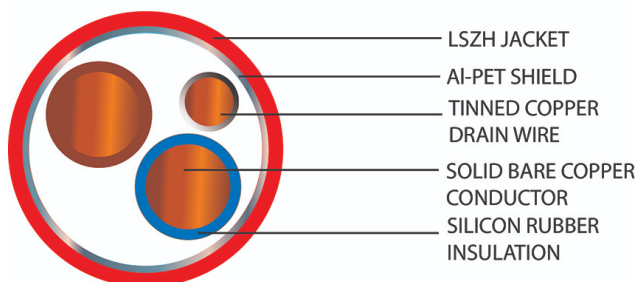

enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



Product Specification

25-YEAR WARRANTY

Cable Construction

Cable Construction	2 Cores
CPR	LPCB
Conductor	Solid Bare Copper
Overall Diameter (mm)	7.80 ±0.01

Insulation

Insulation	Silicon Rubber
Insulation Colour	Blue,Brown
Insulation Thickness (mm)	0.70 ±0.02

Outer/Jacket Specification

Jacket	LSZH
Overall Colour	Red
Overall Diameter (mm)	7.80 ±0.01
Jacket Colour	Red RAL 3000
Jacket Thickness (mm)	0.70 ±0.01

Electrical Characteristics

Rated Temperature (°C)	-30° to +70°
Rated Voltage (V)	300/500V



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



FIRE CABLE

Securi-Flex®

MORE INFORMATION:

Sorry, no more information is available for this product

Fire cable



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

FLAME-FLEX® **Drum-Roll** **LUCKINS®**

apim
supply chain

ELECTRICAL
DISTRIBUTORS' ASSOCIATION

BASEC
MEMBER

KNX
MEMBER

cai
MEMBER

CPA
MEMBER

UK
CA