



TITLE:

FR30 Fire Standard Flame-Flex 60

CODE:

SFX/FC-2C-2.5-FR60-STD-RED-100


DESCRIPTION:

100m 2 Core 2.5mm 300/500V Red
Standard FLAME-FLEX 60

SUPPLIED AS:

Reel of 100m

- Can be used both internally and externally in environments where suitable protection is present
- Polymer tape comes away from the sheath when stripping cable
- Low smoke zero halogen plastic is good for use inside public buildings and spaces as will not emit toxic gases if the cable catches fire
- Can be used for emergency lighting applications
- Suitable for installations where a circuit must be maintained for up to 60 minutes in the event of a fire
- Various lengths in stock

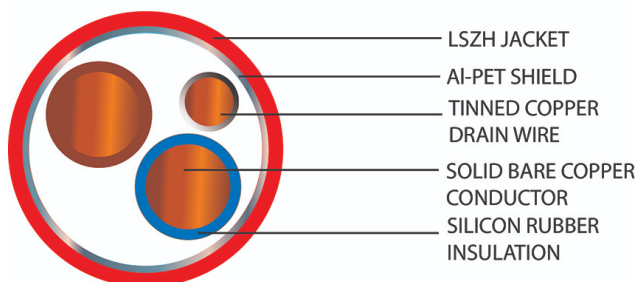

enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



Product Specification

25-YEAR WARRANTY

Cable Construction

| | |
|-----------------------|-------------------|
| Cable Construction | 2 Cores |
| CPR | LPCB |
| Conductor | Solid Bare Copper |
| Overall Diameter (mm) | 8.90 ±0.01 |

Insulation

| | |
|---------------------------|----------------|
| Insulation | Silicon Rubber |
| Insulation Colour | Blue,Brown |
| Insulation Thickness (mm) | 0.80 ±0.02 |

Outer/Jacket Specification

| | |
|-----------------------|--------------|
| Jacket | LSZH |
| Overall Colour | Red |
| Overall Diameter (mm) | 8.90 ±0.01 |
| Jacket Colour | Red RAL 3000 |
| Jacket Thickness (mm) | 0.80 ±0.01 |

Electrical Characteristics

| | |
|------------------------|--------------|
| Rated Temperature (°C) | -30° to +70° |
| Rated Voltage (V) | 300/500V |



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



FIRE CABLE



MORE INFORMATION:

Sorry, no more information is available for this product

Fire cable



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

