



## TITLE:

FR120 Fire Enhanced Flame-Flex

## CODE:

SFX/FC-3C-1.5-FR120-ENH-RED-1


## DESCRIPTION:

1m (per metre) FR120 3 Core 1.5mm  
300/500V Red Enhanced FLAME-FLEX  
120

## SUPPLIED AS:

Per 1m Lengths

- Can be used both internally and externally in environments where suitable protection is present
- Polymer tape comes away from the sheath when stripping cable
- Low smoke zero halogen plastic is good for use inside public buildings and spaces as will not emit toxic gases if the cable catches fire
- High resistance to kinks to protect cables performance
- Suitable for installations where a circuit must be maintained for up to 120 minutes in the event of a fire
- Can be cut to any length required up to 500m to reduce installation times

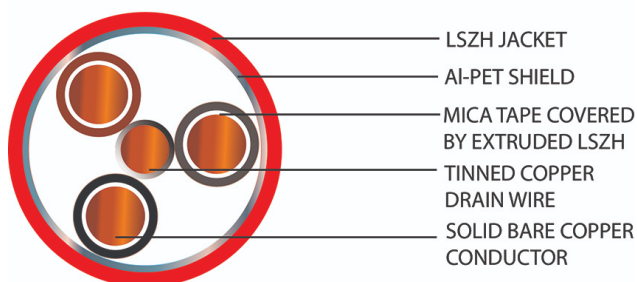

enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



## Product Specification

25-YEAR WARRANTY

### Cable Construction

Cable Construction	3 Cores
CPR	LPCB
Conductor	Solid Bare Copper
Overall Diameter (mm)	9.20 ±0.01

### Insulation

Insulation	Mica tape covered by extruded LSZH
Insulation Colour	Brown, Black Grey
Insulation Thickness (mm)	0.70 ±0.02

### Outer/Jacket Specification

Jacket	UV LSZH
Overall Colour	Red
Overall Diameter (mm)	9.20 ±0.01
Jacket Colour	Red RAL 3000
Jacket Thickness (mm)	0.70 ±0.01

### Electrical Characteristics

Rated Temperature (°C)	-30° to +70°
Rated Voltage (V)	300/500V



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



**FIRE CABLE**



**MORE INFORMATION:**

Sorry, no more information is available for this product

Fire cable



[enquiries@securiflex.co.uk](mailto:enquiries@securiflex.co.uk) | [www.securiflex.co.uk](http://www.securiflex.co.uk) | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

