

**TITLE:**

Profibus DP Equivalent LSZH Purple

CODE:


SFX/OFB1-22-LSZH-D-PUR-1000

DESCRIPTION:

1000m OFB1-22 1pr 22AWG Overall Foil and Braid Screen 600V Purple LSZH (3079A)

SUPPLIED AS:

Reel of 1000m

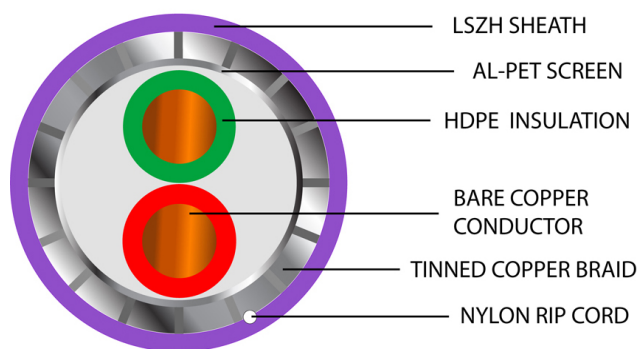

enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



Product Specification

Cable Construction

Cable Construction	1 Pair
CPR	Dca -s:2 -a:1 -d:2
Conductor	Bare Copper
Conductor Diameter (mm)	0.65 ±0.008 x 1(0.33mm ²)
Overall Diameter (mm)	8.00 ±0.20

Insulation

Insulation	HDPE
Insulation Colour	Red, Green
Insulation Resistance @20°C	>200MO/km
Insulation Thickness (mm)	0.4

Outer/Jacket Specification

Jacket	LSZH
Overall Colour	Purple
Overall Diameter (mm)	8.00 ±0.20
Jacket Colour	Purple RAL 4005
Jacket Thickness (mm)	0.9
Nylon Rip-Cord	150D

Electrical Characteristics

Insulation Resistance @20°C	>200MO/km
Max Conductor DC resistance @ 20°C	<53O/km
Rated Temperature (°C)	-40°C to 70°C
Rated Voltage (V)	600V





**BELDEN
EQUIVALENTS**

Securi-Flex®

MORE INFORMATION:

Sorry, no more information is available for this product

Belden equivalents



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

