

**TITLE:**

OFB Overall Foil & Braid Screened Pairs
LSZH

CODE:



SFX/OFB1-LSZH-D-GRY-1

DESCRIPTION:

1m (per metre) OFB1 1pr 24AWG Overall
Foil and Braid Screen 600V Grey LSZH
(9841)

SUPPLIED AS:

Per 1m Lengths

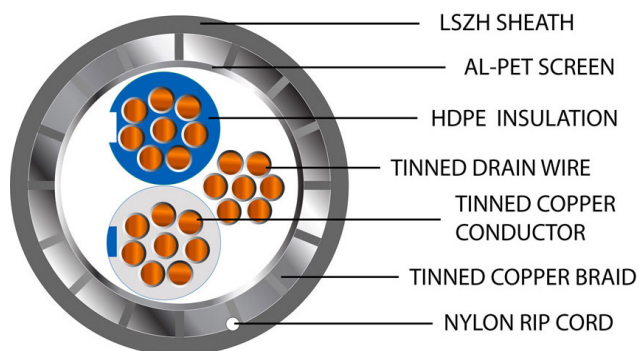

enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



Product Specification

Cable Construction

Cable Construction	1 Pair
CPR	Dca -s:2 -a:1 -d:2
Conductor	Tinned Copper
Conductor Diameter (mm)	0.19 ±0.008 x 8(0.20mm ²)
Overall Diameter (mm)	5.90 ±0.20

Insulation

Insulation	HDPE
Insulation Colour	White/Blue,Blue/White
Insulation Resistance @20°C	>200MO/km
Insulation Thickness (mm)	0.55

Outer/Jacket Specification

Jacket	LSZH
Overall Colour	Grey
Overall Diameter (mm)	5.90 ±0.20
Jacket Colour	Grey RAL 7042
Jacket Thickness (mm)	0.80
Nylon Rip-Cord	150D

Electrical Characteristics

Insulation Resistance @20°C	>200MO/km
Max Conductor DC resistance @ 20°C	<83O/km
Rated Temperature (°C)	-40°C to 70°C
Rated Voltage (V)	600V





**BELDEN
EQUIVALENTS**

Securi-Flex®

MORE INFORMATION:

Sorry, no more information is available for this product

Belden equivalents



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

