



## TITLE:

OFB Overall Foil & Braid Screened Pairs  
External

## CODE:

SFX/OFB2-PE-BLK-1



## DESCRIPTION:

1m (per metre) OFB2 2pr 24AWG Overall  
Foil and Braid Screen 600V Black PE  
(9842)

## SUPPLIED AS:

Per 1m Lengths

- Suitable for RS485 data connections
- Provides interference free and high speed data transmission
- Polyethylene plastic is excellent for use externally above ground or below ground inside ducting
- A quality alternative to genuine Belden cable
- UV resistant

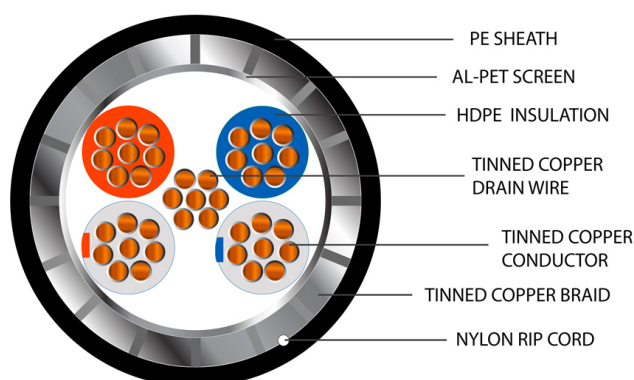



## Product Specification



### Cable Construction

|                         |                                       |
|-------------------------|---------------------------------------|
| Cable Construction      | 2 Pairs                               |
| CPR                     | Fca                                   |
| Conductor               | Tinned Copper                         |
| Conductor Diameter (mm) | 0.19 ±0.008 x 8(0.20mm <sup>2</sup> ) |
| Stranded Diameter (mm)  | 0.51                                  |
| Overall Diameter (mm)   | 8.65 ±0.20                            |

### Insulation

|                             |                                        |
|-----------------------------|----------------------------------------|
| Insulation                  | HDPE                                   |
| Insulation Colour           | White/Blue, Blue; White/Orange, Orange |
| Insulation Resistance @20°C | >200MO/km                              |
| Insulation Thickness (mm)   | 0.55                                   |

### Outer/Jacket Specification

|                       |                |
|-----------------------|----------------|
| Jacket                | PE             |
| Overall Colour        | Black          |
| Overall Diameter (mm) | 8.65 ±0.20     |
| Jacket Colour         | Black RAL 9005 |
| Jacket Thickness (mm) | 0.80           |
| Nylon Rip-Cord        | 150D           |

### Electrical Characteristics

|                                    |               |
|------------------------------------|---------------|
| Insulation Resistance @20°C        | >200MO/km     |
| Max Conductor DC resistance @ 20°C | <83O/km       |
| Rated Temperature (°C)             | -20°C to 80°C |
| Rated Voltage (V)                  | 600V          |





## MORE INFORMATION:

| EURO CLASS<br>(ca: cable)        | CLASSIFICATION CRITERIA                                               |                                                                                                                                                                                                     | CPR GUIDE                                                                       |                                                                                                         |
|----------------------------------|-----------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|
|                                  | FIRE RATING                                                           | SFX COMMENT                                                                                                                                                                                         |                                                                                 | Securi-Flex®                                                                                            |
| Reaction to Fire BS EN ISO 1716  |                                                                       |                                                                                                                                                                                                     | SUBCLASSIFICATIONS FOR EUROCLASSES Bca to Dca                                   |                                                                                                         |
| <b>A<sub>ca</sub></b>            | Does not contribute to the fire                                       | Due to availability, it will be almost impossible for a cable to meet Aca, so they should only be specified with extreme caution.                                                                   | <b>(S) SMOKE PRODUCTION</b>                                                     | <b>(D) FLAMING DROPLETS</b>                                                                             |
| Reaction to Fire BS EN 50399     |                                                                       |                                                                                                                                                                                                     | BS EN 50399/BS EN 61034-2                                                       | BS EN 50399                                                                                             |
| <b>B1<sub>ca</sub></b>           | Minimum contribution to the fire                                      | It's highly unlikely the commonly-used cables will be classified to Class B1ca.                                                                                                                     | s1a: s1 + transmittance >=80% (BS EN 61034-2)                                   | d0: No fall of droplets or flaming particles, times for 1200 seconds                                    |
| <b>B2<sub>ca</sub></b>           | Combustible, low flame spread & heat release contribution to the fire | Similar to Class Cca, although a lower acceptable heat release rate and burn measurement. In practice, this is likely to be the highest class cables will meet.                                     | s1b: s1 + transmittance >=60% <80% (BS EN 61034-2)                              | d1: Fall of droplets or flaming particles that persist for less than 10 seconds, timed for 1200 seconds |
| <b>C<sub>ca</sub></b>            | Combustible, moderate flame spread & heat release                     | This is a more rigorous test than Class Dca, this is widely accepted across Europe as the 'go to' classification, but be aware, many cables do not meet Class Cca though availability is improving. | s1: Low production of slow propagation of smoke                                 | a1: Very low acidity (conductivity <2.5 μS/mm & pH >4.3)                                                |
| <b>D<sub>ca</sub></b>            | Combustible, moderate flame spread & heat release                     | This classification has relatively little use or acceptance within specifying/contracting organisations. This is because no large scale fire growth is measured.                                    | s2: Intermediate production & propagation of smoke                              | a2: low acidity (conductivity <10 μS/mm & pH >4.3)                                                      |
| Reaction to Fire BS EN 60332-1-2 |                                                                       |                                                                                                                                                                                                     | s3: None of the above                                                           | d2: None of the above                                                                                   |
| <b>E<sub>ca</sub></b>            | Combustible, limited fire spread of less than 425mm                   | A basic test for vertical flame propagation for a single insulated wire or cable using a 1 KW pre-mixed flame. Note: This test does not measure heat release, toxic fumes or smoke.                 | Visit us online: <a href="http://www.securiflex.co.uk">www.securiflex.co.uk</a> |                                                                                                         |
| <b>F<sub>ca</sub></b>            | Combustible, fire spread of more than 425mm                           | Cables classified to Class Fca may have high levels of flammability due to the materials they are made of. This does not mean that the cable cannot be used, it is more likely to be used external. | The Trusted Cable Brand                                                         |                                                                                                         |

## OUR OPERATING TEMPERATURE RANGE GUIDE



Securi-Flex®

enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23