



TITLE:

OSC Overall Foil Screened Cores LSF

CODE:


SFX/OSC3-22-LSZH-D-GRY-1

DESCRIPTION:

1m (per metre) OSC3-22 3 Core 22AWG
Overall Foil Screen 600V Grey LSZH
(8771)

SUPPLIED AS:

Per 1m Lengths

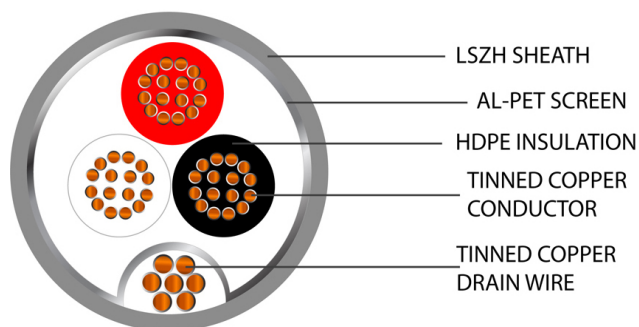

enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



Product Specification

Cable Construction

Cable Construction	3 Cores
CPR	Dca -s:2 -a:1 -d:2
Conductor	Tinned Copper
Conductor Diameter (mm)	0.24 ±0.008 x 7 (0.33mm ²)
Overall Diameter (mm)	5.00 ±0.20

Insulation

Insulation	HDPE
Insulation Colour	Red,Black,Clear
Insulation Resistance @20°C	>200MO/km
Insulation Thickness (mm)	0.43

Outer/Jacket Specification

Jacket	LSF
Overall Colour	Grey
Overall Diameter (mm)	5.00 ±0.20
Jacket Colour	Grey RAL 7042
Jacket Thickness (mm)	0.7

Electrical Characteristics

Insulation Resistance @20°C	>200MO/km
Max Conductor DC resistance @ 20°C	<57.00O/km
Rated Temperature (°C)	-20°C to 80°C
Rated Voltage (V)	600V





**BELDEN
EQUIVALENTS**

Securi-Flex®

MORE INFORMATION:

Sorry, no more information is available for this product

Belden equivalents



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

