

**TITLE:**

OSC Overall Foil Screened Cores LSZH

**CODE:**


SFX/OSC4-LSZH-D-GRY-1000

**DESCRIPTION:**

1000m OSC4 4 Core 24AWG Overall Foil  
Screen 600V Grey LSZH (9534)

**SUPPLIED AS:**

Reel of 1000m

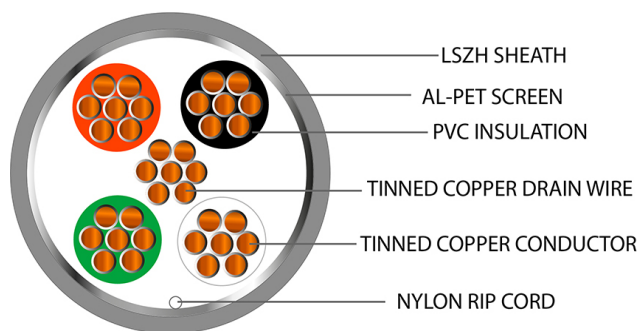

enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



## Product Specification

### Cable Construction

Cable Construction	4 Cores
CPR	Dca -s:2 -a:1 -d:2
Conductor	Tinned Copper
Conductor Diameter (mm)	0.19 ±0.008 x 7 (0.22mm <sup>2</sup> )
Overall Diameter (mm)	4.0 ±0.20

### Insulation

Insulation	PVC
Insulation Colour	Red,Black,White,Green
Insulation Resistance @20°C	>200MO/km
Insulation Thickness (mm)	0.3

### Outer/Jacket Specification

Jacket	LSZH
Overall Colour	Grey
Overall Diameter (mm)	4.0 ±0.20
Jacket Colour	Grey RAL 7042
Jacket Thickness (mm)	0.50

### Electrical Characteristics

Insulation Resistance @20°C	>200MO/km
Max Conductor DC resistance @ 20°C	<90.00O/km
Rated Temperature (°C)	-40°C to 70°C
Rated Voltage (V)	600V





**BELDEN  
EQUIVALENTS**

**Securi-Flex®**

**MORE INFORMATION:**

Sorry, no more information is available for this product

Belden equivalents



[enquiries@securiflex.co.uk](mailto:enquiries@securiflex.co.uk) | [www.securiflex.co.uk](http://www.securiflex.co.uk) | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

**FLAME-FLEX®**

**Drum-Roll**

**LUCKINS®**

**apim**  
accredited provider

**ELECTRICAL  
DISTRIBUTORS  
ASSOCIATION**

**BASEC**  
MEMBER

**KNX**  
MEMBER

**cai**  
MEMBER

**CPA**  
MEMBER

**UK  
CA**