

**TITLE:**

OSC Overall Foil Screened Cores LSZH

**CODE:**


SFX/OSC6-LSZH-D-GRY-100

**DESCRIPTION:**

100m OSC6 6 Core 24AWG Overall Foil  
Screen 600V Grey LSZH (9536)

**SUPPLIED AS:**

Reel of 100m

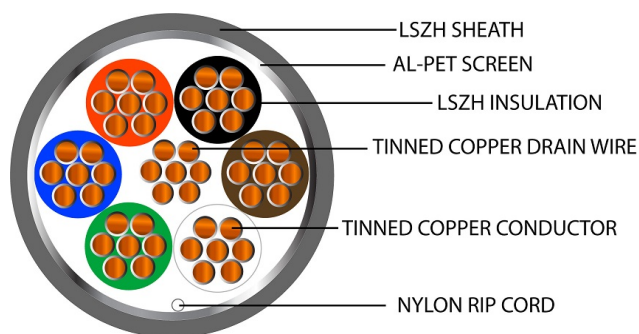

enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



## Product Specification

### Cable Construction

Cable Construction	6 Cores
CPR	Dca -s:2 -a:1 -d:2
Conductor	Tinned Copper
Conductor Diameter (mm)	0.19 ±0.008 x 7 (0.22mm <sup>2</sup> )
Overall Diameter (mm)	4.90 ±0.20

### Insulation

Insulation	LSZH
Insulation Colour	Red,Black,White,Green,Blue,Brown
Insulation Resistance @20°C	>200MO/km
Insulation Thickness (mm)	0.3

### Outer/Jacket Specification

Jacket	LSZH
Overall Colour	Grey
Overall Diameter (mm)	4.90 ±0.20
Jacket Colour	Grey RAL 7042
Jacket Thickness (mm)	0.70

### Electrical Characteristics

Insulation Resistance @20°C	>200MO/km
Max Conductor DC resistance @ 20°C	<90.00O/km
Rated Temperature (°C)	-40°C to 70°C
Rated Voltage (V)	600V





**BELDEN  
EQUIVALENTS**

**Securi-Flex®**

**MORE INFORMATION:**

Sorry, no more information is available for this product

Belden equivalents



[enquiries@securiflex.co.uk](mailto:enquiries@securiflex.co.uk) | [www.securiflex.co.uk](http://www.securiflex.co.uk) | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

