

**TITLE:**

USC2 1pr Unscreened LSZH

CODE:


SFX/USC2-22-LSZH-D-GRY-1000

DESCRIPTION:

1000m USC2-22 1pr 22AWG Unscreened
600V Grey LSZH (8442)

SUPPLIED AS:

Reel of 1000m

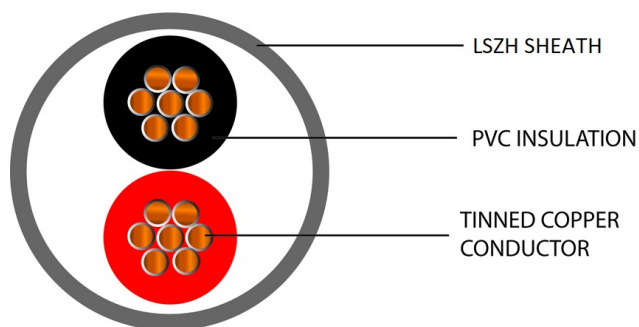

enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



Product Specification

Cable Construction

Cable Construction	2 Cores
CPR	Dca -s:2 -a:1 -d:2
Conductor	Tinned Copper
Conductor Diameter (mm)	0.3 ±0.008 x 7(0.33mm ²)
Overall Diameter (mm)	4.30 ±0.20

Insulation

Insulation	LSZH
Insulation Colour	Black, Red
Insulation Resistance @20°C	>200MO/km
Insulation Thickness (mm)	0.28

Outer/Jacket Specification

Jacket	LSZH
Overall Colour	Grey
Overall Diameter (mm)	4.30 ±0.20
Jacket Colour	Grey RAL 7042
Jacket Thickness (mm)	1.00 ±0.20

Electrical Characteristics

Insulation Resistance @20°C	>200MO/km
Max Conductor DC resistance @ 20°C	57.00O/km
Rated Temperature (°C)	-40°C to 70°C
Rated Voltage (V)	600V



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



**BELDEN
EQUIVALENTS**

Securi-Flex®

MORE INFORMATION:

Sorry, no more information is available for this product

Belden equivalents



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

